



REV	DESCRIPTION	ECN NO.	NAME	DATE

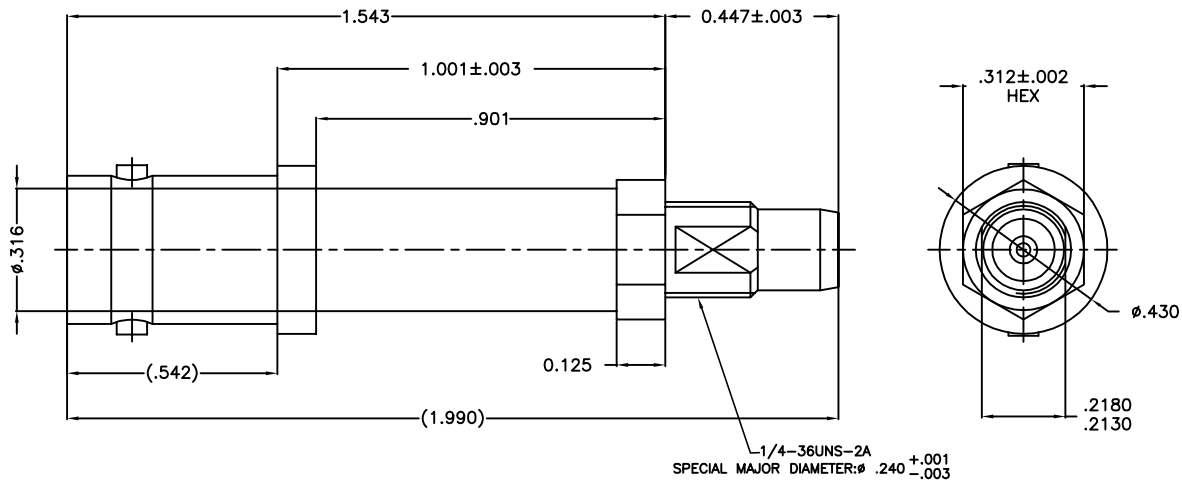

- 注:
- 1 产品须加盖防尘帽
 - 2 出货时螺母和内齿垫圈为散件, 不要装配到主体

ALL PARTS SATISFIED ROHS REQUIREMENTS

材料与电镀(MATERIALS AND PLATING) UNIT: MICRO-INCHES		
主体 BODY	黄铜 BRASS C36000	铜底, 镍底, 镀金30μ" GOLD 30 MIN./NICKEL/COPPER
中心针 CONTACT PIN	铍青铜 Be-Cu C17300.	铜底, 镍底, 镀金50μ" GOLD 50 MIN./NICKEL/COPPER
绝缘体: INSULATOR	聚四氟乙烯 TEFLON ASTM D-1457	N/A
螺母 NUT	不锈钢 STAINLESS AISI 303	铜底, 镍底, 镀金20μ" GOLD 20 MIN./NICKEL/COPPER

电气性能 (ELECTRICAL CHARACTERISTICS)	
特性阻抗 (Impedance)	50 Ω
频率范围 (Frequency range)	0~4GHz
工作电压(Voltage rating)	335 V(rms)
介电耐压 (Dielectric withstanding voltage)	1000 V
接触电阻 (Contact resistance)	Initial
内导体 (Center contact)	≤3mΩ
外导体 (Outer contact)	≤2mΩ
绝缘电阻 (Insulation resistance)	≥5000MΩ
插入损耗(Insertion loss)	0.25 dB MAX
电压驻波比(VSWR)	1.15 MAX
PROPAGATION DELAY	165±5 pSEC

CUSTOMER OUTLINE DRAWING

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

ISSUE	A	SCALE	PART NO.	
			-	
UNLESS OTHERWISE SPECIFIED			APPROVED Sam	
1) EDGES C0.15 MAX. 2) REMOVE ALL BURRS 3) SURFACE ROUGHNESS Ra1.6 4) UNITS: mm 5) DIMENSIONS DECIMALS .x ±0.3 .xx ±0.2			CHECKED Sam	
TOLERANCES ANGLES ±2°			DRAWN Michael	
			DATE 05/17/2011	TITLE BNC FEMALE TO BMA MALE ADAPTOR DRAWING NO. 5BNF06S-BMM Company Website: http://www.superlinkrf.com